

CivaControl™ II Air System

Take control of your tank trailer air system operations with our new CivaControl™ II air control panels that can easily operate in the coldest conditions. These new lighter controls feature a modular design that reduces weight and complexity. Yet still makes it ready to handle your heavy duty Petroleum Operation day in and day out.



SCP-5



Features

- Modular (Stackable) 3-2 Ported Valve Block Design
- Maximum pressure 150 PSI
- Positive air reset / shut down feature ensures no valve is left open after shutting down the master valve
- High air flow in a small package ensures quick opening and fast shut down
- Black anodized for improved low temperature performance
- High endurance urethane seals rated at -40° F (-40° C)

Fail Safe Operation

- CivaControl™ II air system gives you the safety of sequenced air controls, that properly control the loading and unloading
- Master positive air shut down protects your tank and the environment by automatically closing all open valves
- Pressure gauge and vents open Indicator for that extra visual assurance and peace of mind

Installation

- Easy to install, complete package installed on panel with DOT air fittings pre-installed
- Individual modular air blocks can also be purchased and assembled to suit your unique needs
- The complete panel incorporates pressure gauge, pop-up indicator, master control valve and stacked push/pull

Ordering Specifications

- SCP 2 – 2 Compartment Air Control Panel
- SCP 3 – 3 Compartment Air Control Panel
- SCP 4 – 4 Compartment Air Control Panel
- SCP 5 – 5 Compartment Air Control Panel
- SCP 6 – 6 Compartment Air Control Panel
- SCP 7 – 7 Compartment Air Control Panel
- 12053-1-A Single Compartment no Panel

*2-5 Compartment panel length 13.5"

*6-7 Compartment panel length 17.5"

CivaControl™ II Air System

Specifications

Product Number

SCP-2 thru SCP-7 (Five Compartment is shown)

Panel Dimensions:

Height - 7"

Width - 13.5" or 17.5"

Distance between knobs - 2"

Materials:

Aluminum, Stainless Steel, Brass and Plastic

Weight:


6.8 lbs. (3.09 kg) (As Shown)

Operating Air Pressure:

90 –150 PSI

Temp. Range:

-40°F to 160° F (-40° C to 70° C)

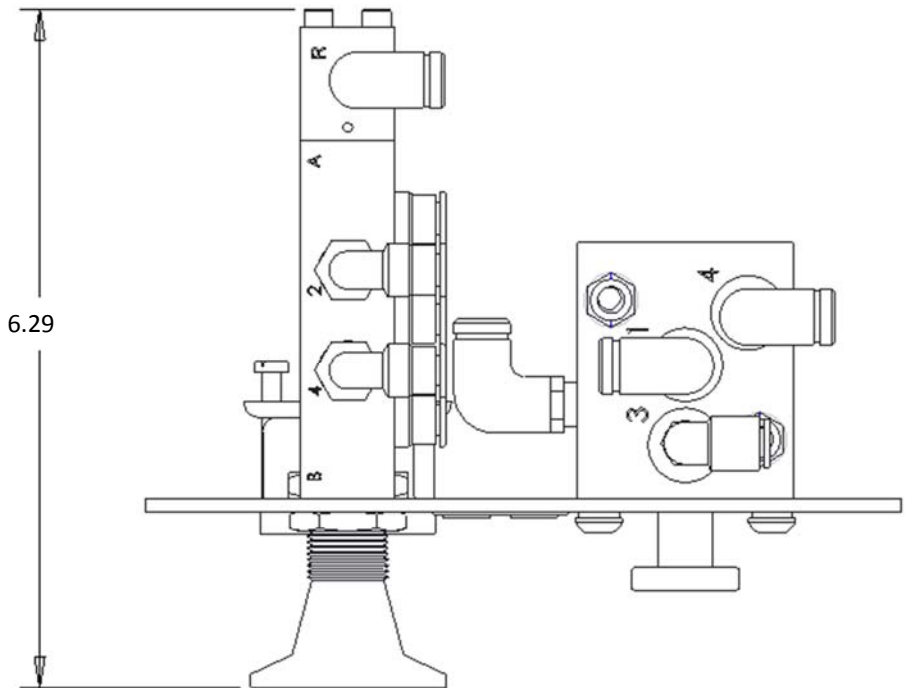

SCP-5 (Shown)

CivaControl II
Modular Panel Assembly



12053-4 -A (Shown)

Four Position 3-2 Ported
Modular Valve



12053-1-A

Single 3-2 Ported Valve



10711-A

3-2 Ported Pneumatic
Emergency Shut Down
Manual Push/Pull Valve



12071-A

5-2 Ported Pneumatic
Master Shut Down
Manual Push/Pull Valve



12069

Gauge
1-1/2" Liquid Filled



9726

Pop-Up Indicator



www.civacon.com ♦ 4304 Mattox Road ♦ Kansas City, MO 64150 ♦ Phone: +1 (816) 741-6600 ♦ Fax: +1 (816) 741-1061

NOTE: All information subject to engineering and/or other changes. All trade names are copyrighted. Patents Pending. ©2014 Civacon.

©2014 Delaware Capital Formation, Inc. All Rights Reserved. DOVER and the DOVER logo are registered trademarks of Delaware Capital Formation, Inc., a wholly-owned subsidiary of Dover Corporation.